

© June 2003 Neuberger & Hughes GmbH

HOWTO for “mapisvc.inf“

If you had installed an older version of “bill“ or “exchange4linux“ you have to delete some contents of the data file “mapisvc.inf“. Then the new version will run successfully.

Open the Windows Explorer.
Select the option “search“

In the line “search for the following file or folder“ enter “mapisvc.inf“.
In the line “search in“ select your local drive (normally “C“).

Now your Windows Explorer should look like the following image (image 1).

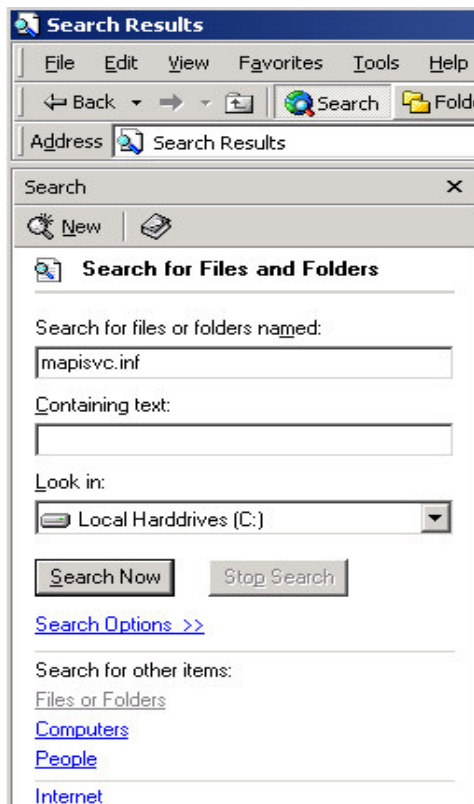






image 1

Start the search now.

2-4 data files should be found.

For example:


Name	In Folder	Releva...	Size	Type	Modified
 mapisvc.inf	C:\Documents and ...		1 KB	Shortcut	4/24/2003 12:36 PM
 MAPISVC.INF	C:\Program Files\Co...		12 KB	Setup Information	5/27/2003 4:58 PM
 MAPISVC.INF.Aft...	C:\Program Files\Co...		11 KB	0 File	4/24/2003 11:22 AM
 mapisvc.inf	C:\WINNT\system32		3 KB	Setup Information	4/24/2003 12:09 PM

TIP: If less data files are found modify the upper and lower case of “mapisvc.inf“.


Open the several data files.

Select the “search“ option and enter “bill”.

1. Delete every line in which you read “bill”.

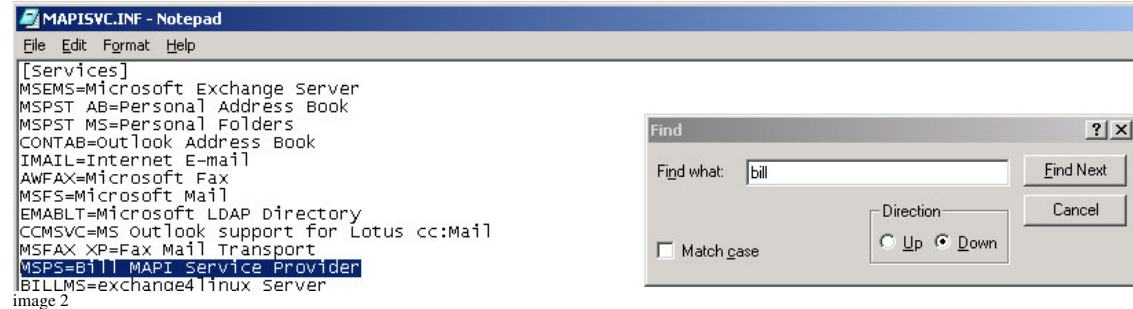

2. Delete every section completely in which you read „bill“ in the headline.
 The headline of a section is written in brackets (for example: “[BILLMS]” or “[BILLMSX]”).

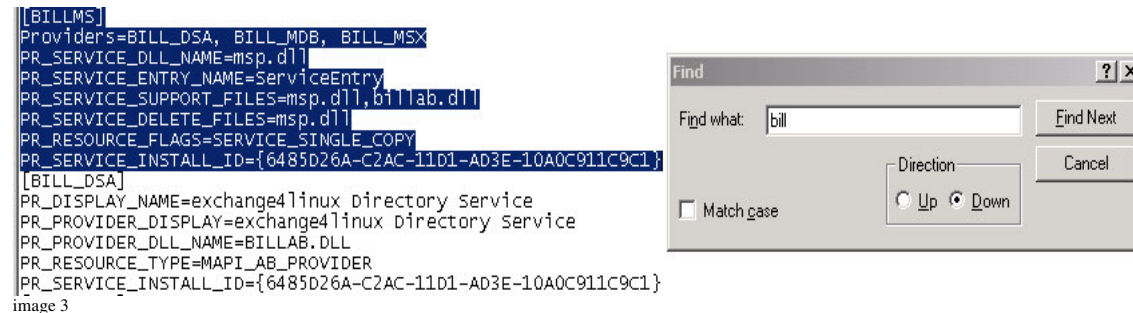

Save the modified data file.

Repeat this activity for every found „mapisvc.inf“ data file.

After that the action is finished.

Now you can install the actual version of the Outlook connector respectively of the Bill workgroup client.